


# Kroll & Ziller Product Brochure

V2021JAN

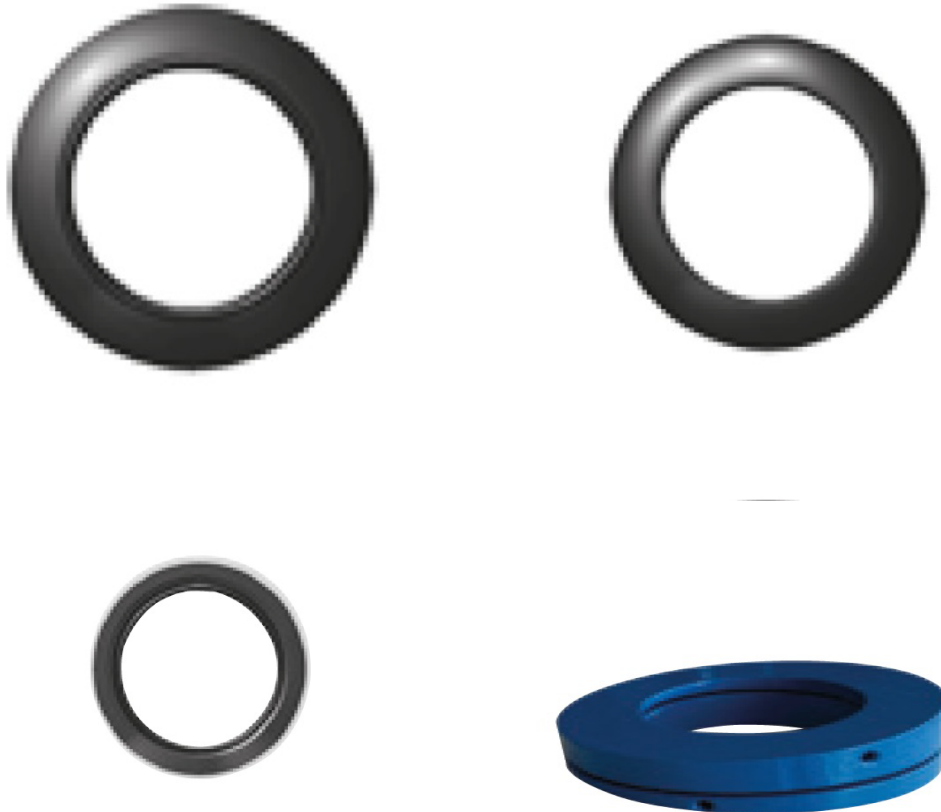

25.1 Rubber and steel gaskets

**Kroll & Ziller** Kroll & Ziller GmbH is a market leader in providing sealing solutions for more than 79 years. It offers Rubber and Steel Gaskets used in various industries like Steel, Pharma, Petrochemical and Gas etc.

# Table of contents

<b>25.1 Rubber and steel gaskets</b>	<b>25.1 - 25.2</b>
25.1.1 G-ST	25.1
25.1.2 G-ST/GUSS	25.1
25.1.3 G-ST-P/S	25.1
25.1.4 G-ST-P/K	25.1
25.1.5 G-ST-P/KN	25.2
25.1.6 G-ST-P/HTB	25.2
25.1.7 G-ST-P/OE	25.2
25.1.8 G-ST-wedge ring	25.2

## 25.1 Rubber and steel gaskets

The Kroll and Ziller Rubber Steel Gaskets provide a reliable solution for sealing. The Gaskets are made by a specialized vulcanization process. These Gaskets are used in the Piping and Construction Industry.

### Industries it caters to

- Piping and Construction Industry

#### 25.1.1 G-ST



#### Selection Parameters

Parameters	Min	Max
Nominal Diameter	15 mm	2000 mm
Nominal Pressure	2.5 N/mm <sup>2</sup>	40 N/mm <sup>2</sup>

#### 25.1.2 G-ST/GUSS



#### Selection Parameters

Parameters	Min	Max
Nominal Diameter	40 mm	500 mm
Nominal Pressure	10 N/mm <sup>2</sup>	40 N/mm <sup>2</sup>

#### 25.1.3 G-ST-P/S



#### Selection Parameters

Parameters	Min	Max
Nominal Diameter	15 mm	1400 mm
Nominal Pressure	2.5 N/mm <sup>2</sup>	40 N/mm <sup>2</sup>

#### 25.1.4 G-ST-P/K



#### Selection Parameters

Parameters	Min	Max
Flange Diameter	10 mm	600 mm
Pipe Outer Diameter	16 mm	630 mm

## 25.1 Rubber and steel gaskets

### 25.1.1 G-ST-P/KN



#### Selection Parameters

Parameters	Min	Max
Nominal Diameter	10 mm	3000 mm
Nominal Pressure	6 N/mm <sup>2</sup>	100 N/mm <sup>2</sup>

### 25.1.2 G-ST-P/HTB



#### Selection Parameters

Parameters	Min	Max
Nominal Diameter	25 mm	250 mm
Nominal Pressure	10 N/mm <sup>2</sup>	40 N/mm <sup>2</sup>

### 25.1.3 G-ST-P/OE



#### Selection Parameters

Parameters	Min	Max
O-Ring Diameter	8 mm	12 mm
Ring Thickness	6 mm	10 mm

### 25.1.4 G-ST-WEDGE RING



#### Selection Parameters

Parameters	Min	Max
Nominal Diameter	40 mm	1200 mm
Height at 0°	23 mm	127 mm
Height at 8°	29 mm	221 mm